


## Safe-D F-Clip 50 - Flex, Fit, Fold & Lock




970°C

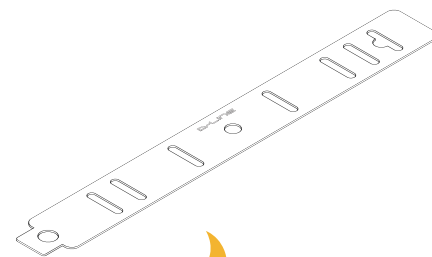

2h


18<sup>th</sup>  
Edition  
Compliant

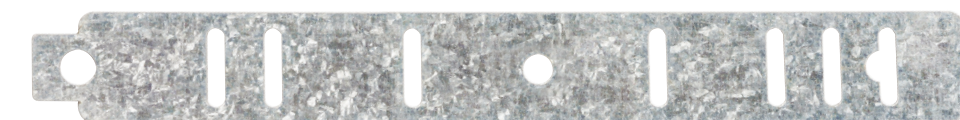

Shot firing nails



F-Clip 50 c/w temporary electrics

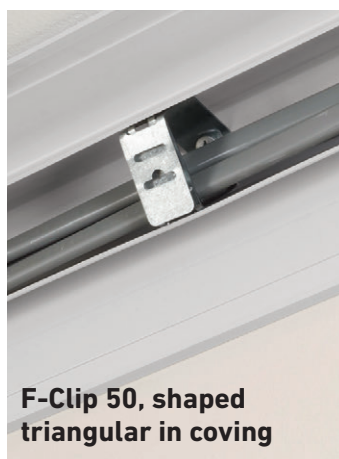

F-Clip 50, shaped triangular in coving




F-Clip 50 c/w FP cables (& locked!)

**Safe-D F-Clip 50 is a fire-rated flexible cable clip that is supplied in flat form, and can be quickly folded to make a variety of shapes to most effectively secure cable installations.**

The first notches (either side of the 5.7mm hole) can be simply folded to make vertical tabs; with the base being perfect for use in 50mm width non-metallic trunking. The locking tab can then be passed through any opposing notch, according to the volume of cables to be secured.

Being 165mm long, this F-Clip is most versatile, and can be easily shaped however required, while users appreciate the pocket-friendly design saves handling and fitting time. In fire-conditions F-Clips can withstand 970C for at least 2 hours, assuring that cable installations will not collapse. F-Clips have been extensively fire-tested on both wall planes and underside ceilings.

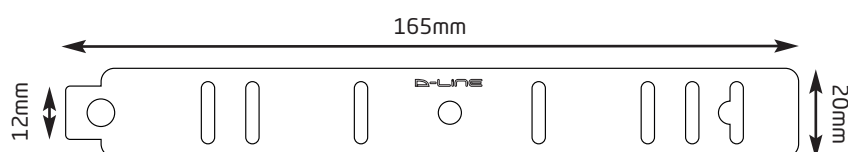

- Supplied flat...
  - Space efficient and pocket friendly
  - Easier handling - to save installation time
  - Easy folding to consider space and cable volume
  - Perfect for shot fired fixings
- Fully safety tested and certified to BS5839 part 1 compliant
- >1200°C melting point
- Non-corrosive finish
- Locking feature to hold cables most securely... simply push the tab through the preferred notch
- Locking tabs can be return-folded for a more secure installation
- 3x fixing holes for versatility, ideal for use with D-Line D-Fixings
- Fit direct to surface, or in PVC trunkings
- Easy to later add or remove cable(s)
  - Can be opened/closed up to 5x

**Code**

**Description**

**SAFEDFCLIP50**

(L) 165mm x (W) 20mm x (H) 35mm (folded - max height) 5.7mm diameter pre-drilled hole in base